AUTOMATIC BALL DRIP VALVE





TECHNICAL DATA

MODEL	D3
HOUSING	Bronze IS:318-LTB-II
BALL	Stainless Steel
APPROVAL	Part of HD's UL Listed Deluge Valve
MAX. WORKING PRESSURE	17.5 Bar (250 PSI)

DESCRIPTION

The Drip Valve Model A is used with Deluge Valve Drip Trim. It is used to drain the small leaks through the Deluge Valve Seat and it also act as a breather to the equipment. On actuation of Deluge Valve the water pressure causes the ball to close the Drip Valve.

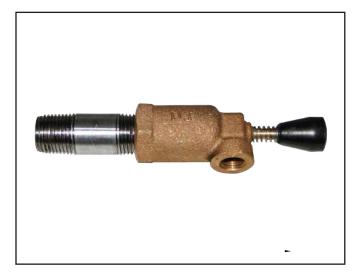



LIMITED WARRANTY

HDFIREPROTECTPVT.LTD.herebyreferredtoasHDFIREwarrantstotheoriginalpurchaserofthefireprotectionproductsmanufacturedbyHDFIREandtoanyotherperson towhomsuchequipmentistransferred,thatsuch productswillbefreefromdefectinmaterial and workmanship under normal use and care, for two (2) years from the date of shipment by HDFIRE.Products or Components supplied or used by HDFIRE, but manufactured by others, are warranted only to the No warranty is given for product or components which have been subject to misuse, improper installation, corrosion, unauthorized repair, alteration or un-maintained. HD FIRE shall not be responsible for system design errors or improper installation or inaccurate or incomplete information supplied by buyer or buyer's representatives. HD FIRE shall not be responsible for system design errors or improper installation or factory, transportation charge prepaid, provided after our inspection the material is found to have been defective atthetime of initial shipment from our works. HDFIREshall not beliable for any damages for injury to person, damages to property and penalties resulting from any product shall not be liable for any damages or charge sustained in the adaptation or use of its engineering data & services. Innoevent shall HDFire's product liability exceed an amount equal to thesale price. The foregoing warranty is exclusive and in lieu of all other warranties and representation whether expressed, implied, oral or written, including but not limited to, any implied warranties or merchantability or fitness for a particular purpose. All such other warranties and representations are hereby cancelled.

NOTICE :

The equipment presented in this bulletin is to be installed in accordance with the latest publication standards of NFPA or other similar organisations and also with the provision of government codes or ordinances wherever applicable.

The information provided by us are to the best of our knowledge and belief, and are general guidelines only. Site handling and installation control is beyond our reach. Hence we give no guarantee for result and take no liability for damages, loss or penalties whatsoever, resulting from our suggestion, information, recommendation or damages due to our product.

Product development is a continuous programme of HD FIRE PROTECT PVT. LTD. and hence the right to modify any specification without prior notice is reserved with the company.



- C Teléfono: (511) 639-0193
- Celular: 973 293 091 | 914 407 708
- Correo: ventas@acisprocess.com / soportedeventas@acisprocess.com
- www.acisprocess.com



